




Temporary Barricades & Partitions

SYSTEM SPECIFICATIONS

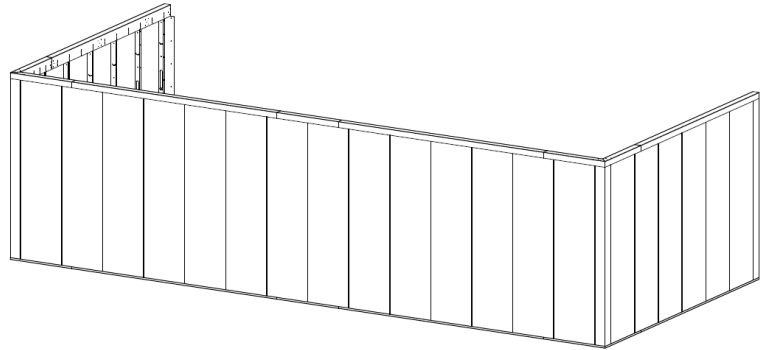

U-Shaped Temporary Barricade

PRODUCT OVERVIEW

A standard *McCain Walls* temporary barricades and partitions consist of interlocking metal panels and rails, designed to create temporary wall solutions including enclosures.

Manufactured from .090 thk aluminum, wall panels are 3.5" in depth, and are available in various widths and heights. Structural calculations allow up to triple 10' stacked walls for an overall 30' tall structure.

The length of a complete *McCain Walls* system is infinite; the dimensions are determined based on the project specifications.

Universal rails provide stability to a *McCain Walls* system and are added to the top and bottom of wall panels, which are fastened together with screws.

Various top and floor mounting options are available. Rails can be attached to any floor finish using a gripping material, low-tack adhesive tape, and/or floor mounts. Folding stand mounts are also available.

Top rails are secured to existing ceilings or wall structures with steel studs and/or other mounting components (if required). Standard corner kits provide 90-degree corners. Variable angle panels are also available for custom angle degrees.

If wall panels need to be removed or added from an existing system, or a door kit needs to be added, it is easily done by unfastening desired panels and making the adjustments needed without breaking down the entire system.

McCain Walls are mold- and mildew-resistant (optional antimicrobial and anti-graffiti coatings are available).

The modular walls, partitions, and enclosures are reconfigurable utilizing optional components:

- Door Kits
- Windows
- Varying Corner Degrees
- Horizontal Adjusting Sliding Panels

McCain Walls have a sound attenuation of an STC 40 rating. The metal modular temporary walls also meet Class A Fire ratings.

McCain Walls are 100% reusable, reconfigurable, and recyclable.

OPTIONAL COMPONENTS

DOOR KITS

Single and double doors are available in inswing and outswing configurations. Standard commercial-lever locksets are included.

Optional self-closing units provide a smooth, automated closing motion.

HORIZONTAL SLIDING PANELS

With a 7" travel span, the horizontal sliding panel can expand up to 30" in length, closing gap tolerances between the the last panel and surface.

VARIABLE ANGLE PANELS

The interchangeable clamp mechanism in the variable angle panel offers 90 - 180 and 180 - 270-degree corners ideal for curved walls.

INSULATION

McCain Walls supports up to 3" insulation sheets, or standard R13 insulation.

MOVEABLE WALL KITS

Movable wall kits are designed to move walls in sections without having to disassemble them. The wheel unit is ideal for multi-phase projects in the same location.

TRANSPORT CARTS

Durable, powder-coated carts with a carpet overlay protects when relocating to a new jobsite.

Wall panels can easily be stacked and stored on carts when not in use.

STANDARD COMPONENTS

	PART #	HEIGHT	WIDTH	WEIGHT
PANELS, CORNERS, & RAILS				
Right Starter Panels	MW-SP-R-AL-120-W	117"	6"	17 lbs
Left Starter Panels	MW-SP-L-AL-120-W	117"	6"	17 lbs
Starter Panel Kit	MW-SP-KIT-120-W	117"	6"	34 lbs
Wall Panels	MW-P-AL-120-06-W	117"	6"	15 lbs
	MW-P-AL-120-12-W	117"	12"	22 lbs
	MW-P-AL-120-24-W	117"	24"	34 lbs
Inside Corner Panel Kit	MW-IC-KIT-AL-120-W	117"	6"	39 lbs
Outside Corner Panel Kit	MW-OC-KIT-AL-120-W	117"	6"	39 lbs
Rails	MW-R-AL-W	6"	96"	12 lbs
Rail Kit	MW-R-KIT	6"	96"	15 lbs
FASTENERS & MOUNTS				
Bracing Plate	MW-F-BP-AL	5"	5"	1 lb
Insulation Hat Bracket - 1"	MW-S-IHB-1-AL	2"	3"	.25 lbs
Insulation Hat Bracket - 2"	MW-S-IHB-2-AL	2"	2"	.25 lbs
Splice Bracket	MW-F-SB-AL	5"	5"	1 lb
Top Bottom Rail Support Bracket Kit	MW-F-TBRBS-KIT-AL	12"	6"	3 lbs
Anchor Mount	MW-F-AM-AL	6"	5"	1 lb
Floor Sand Mount	MW-F-FSM-AL	6"	14"	2 lbs
Rail Mount	MW-F-RM-AL	10"	6"	1 lb

OPTIONAL COMPONENTS

	PART #	HEIGHT	WIDTH	WEIGHT
DOOR KITS				
Single Door Left-Hand (Outswing / Inswing)	MW-SDLH-AL-120-W	117"	48"	153 lbs
Single Door Right-Hand (Outswing / Inswing)	MW-SDRH-AL-120-W	117"	48"	153 lbs
Double Door Right-Hand In-Swing	MW-DDRHI-AL-120-W	117"	96"	263 lbs
Double Door Right-Hand Out-Swing	MW-DDRHO-AL-120-W	117"	96"	263 lbs
Self-Closing Unit - Single Door	MW-SDC-KIT-AL-W	-	-	6 lbs
Self-Closing Unit - Double Door	MW-DDC-KIT-AL-W	-	-	12 lbs
PANELS				
Horizontal Sliding Panel	MW-AP-HSP-AL-1013R-120-W	117"	10 - 13"	27 lbs
	MW-AP-HSP-AL-2330R-120-W	117"	23 - 30"	52 lbs
Variable Angle Panel	MW-VAP-AL-120-W	117"	6"	33 lbs
	MW-WP-AL-120-24-60-W	117"	24"	40 lbs
Window Panel	MW-WP-AL-120-48-48-W	40"	48"	100 lbs
	MW-WP-AL-120-48-60-W	48"	60"	110 lbs
OTHER				
Adjustable Top Trim Cap	MW-FT-TTCA-AL-18-W	18"	-	16 lbs
Ceiling Mount	MW-F-CM-AL-W	96"	4"	8 lbs
Steel Folding Adjustable Wall Stand	MW-STL-STAND-AF-10D-Y	48"	96"	115 lbs
	MW-FT-TTC-AL-8-W	8"	96"	10 lbs
Top Trim Caps	MW-FT-TTC-AL-18-W	18"	96"	30 lbs
	MW-FT-TTC-AL-30-W	30"	96"	33 lbs
Transport Cart	MW-CART-AL	50"	27"	95 lbs
Trim Strip	MW-FT-S-AL-W	3"	117"	4 lbs
Wheel Crank System	MW-WCS-P-12-KIT-W	20"	6"	48 lbs

**Dimensions rounded to the nearest inch. These specifications are for aluminum McCain Walls systems only. For a complete list, contact your McCain Walls representative.*

For More Info or a Free Quote
 760.295.9230 | info@mccainwalls.com | www.mccainwalls.com/get-quote